


### PARTS & MATERIAL LIST

ITEM	PART NAME	MATERIAL
1	Body	ASTM A351 CF8
2	Screen	304SS
3	Bonnet	ASTM A351 CF8
4	Body bolt	ASTM A320 B8
5	Bonnet nut	ASTM A194 8
6	Gasket	PTFE

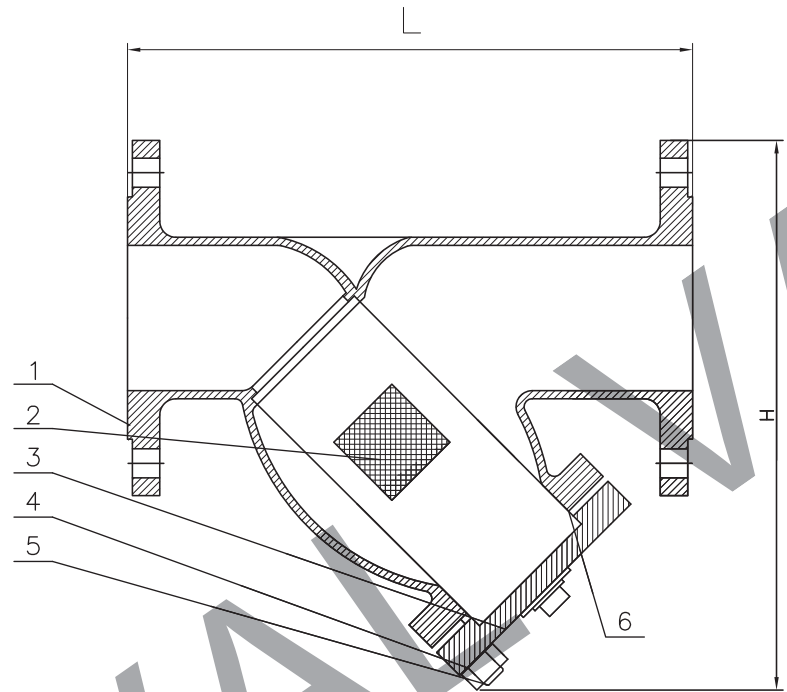

- NOTES:**  
 1 MATERIAL STANDARD:ANSI B16.34  
 2 HYDRO-TEST:API 598  
 3 FACE TO FACE DIMENSIONS:ANSI B16.10  
 4 END FLANGE DIMENSIONS:ANSI B16.5

Performance Specification			
Test Pressure	Nominal Pressure	11.0	MPa
	Intensity test	16.5	
	Back seal test	\	
	Seal test	\	
	Gas test	\	
Working Temperature		150	°C
Medium: water oil & gas			

CLASS	in	L	H
600LB	2"	292	250
	2.5"	330	280
	3"	356	315
	4"	432	360
	5"	508	420
	6"	559	450
	8"	660	580
	10"	787	620
	12"	838	730
	14"	889	800
	16"	991	850
18"	1092	930	
20"	1194	960	
24"	1397	1200	

STRAINER-"Y" TYPE CLASS600LB			
CLIENT		DWG REV .NO	00
P.O.NO		CLASS	
APPROVED BY		HYDROSTATIC	SHELL
REVIEWED BY		TEST (PSI)	SEAT
MADE BY		AIR TSET	
DRAWING NO	GLQ-Y-6-CF8	DATE	
<b>GDVAL VALVE</b>			