


PARTS & MATERIAL LIST

ITEM	PART NAME	MATERIAL
1	Body	ASTM A216 WCB
2	Screen	304SS
3	Bonnet	ASTM A216 WCB
4	Body bolt	ASTM A193 B7
5	Bonnet nut	ASTM A194 2H
6	Gasket	Graphite+304

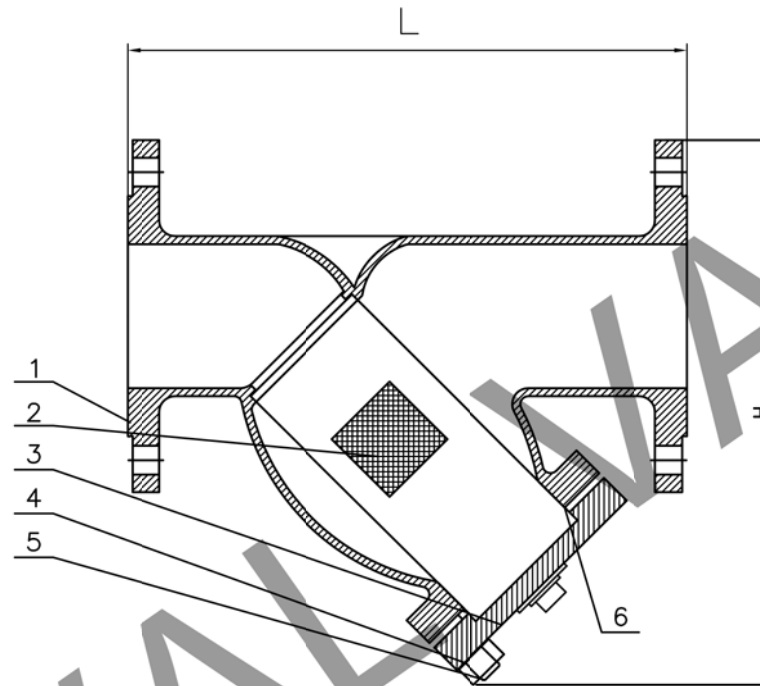

NOTES:

- 1 MATERIAL STANDARD:ANSI B16.34
- 2 HYDRO-TEST:API 598
- 3 FACE TO FACE DIMENSIONS:ANSI B16.10
- 4 END FLANGE DIMENSIONS:ANSI B16.5

Performance Specification		
Nominal Pressure	11.0	
Test Pressure	Intensity test	16.5
	Back seal test	\
	Seal test	\
	Gas test	\
Working Temperature	425	°C
Medium: water oil & gas		

CLASS	in	L	H
600LB	2"	292	250
	2.5"	330	280
	3"	356	315
	4"	432	360
	5"	508	420
	6"	559	450
	8"	660	580
	10"	787	620
	12"	838	730
	14"	889	800
	16"	991	850
	18"	1092	930
20"	1194	960	
24"	1397	1200	

STRAINER-"Y" TYPE CLASS600LB			
CLIENT		DWG REV .NO	00
P.I.NO		CLASS	
APPROVED BY		HYDROSTATIC TEST (PSI)	SHELL SEAT
REVIEWED BY		AIR TSET	
MADE BY	GLQ-Y-6-WCB	DATE	
DRAWING NO	GLQ-Y-6-WCB	DATE	
GDVAL VALVE			